

WiMOD - iM88x

Application Note AN011 / Version 1.1

Range Test



Document ID: 4100/40140/0067

IMST GmbH

Carl-Friedrich-Gauss-Str. 2-4

D-47475 Kamp-Lintfort



Document Information

File name	iM88x_AN011_RangeTest.docx
Created	2013-08-05
Total pages	10

Revision History

Version	Description
0.1	Preliminary version.
1.0	Released
1.1	Extended scope to iM880B. Renamed document to iM88x_AN011_RangeTest.doc

Aim of this Document

Aim of this document is to give an overview about the result of various range tests made with the SK-iM880x (iM880A and iM880B) and SK-iM881A (iM881A).

Table of Contents

1	OVERVIEW	4
2	RANGE TESTS	4
2.1	Test 7720 Meter	4
2.1.1	Settings	5
2.1.2	Results	5
2.2	Test 12000 Meter	6
2.2.1	Results	6
3	APPENDIX	8
3.1	List of Abbreviations	8
3.2	List of Figures	8
3.3	List of Tables	8
4	REGULATORY COMPLIANCE INFORMATION	9
5	IMPORTANT NOTICE	10
5.1	Disclaimer	10
5.2	Contact Information	10

1 Overview

Aim of this document is to give an overview about the result of various range tests made with the iM880x StarterKit SK-iM880x, see www.wireless-solution.de.

2 Range Tests

2.1 Test 7720 Meter

This range test was performed on a distance of 7.72 km near the cities Schaephuysen, Neukirchen-Vluyn and Kamp-Lintfort.

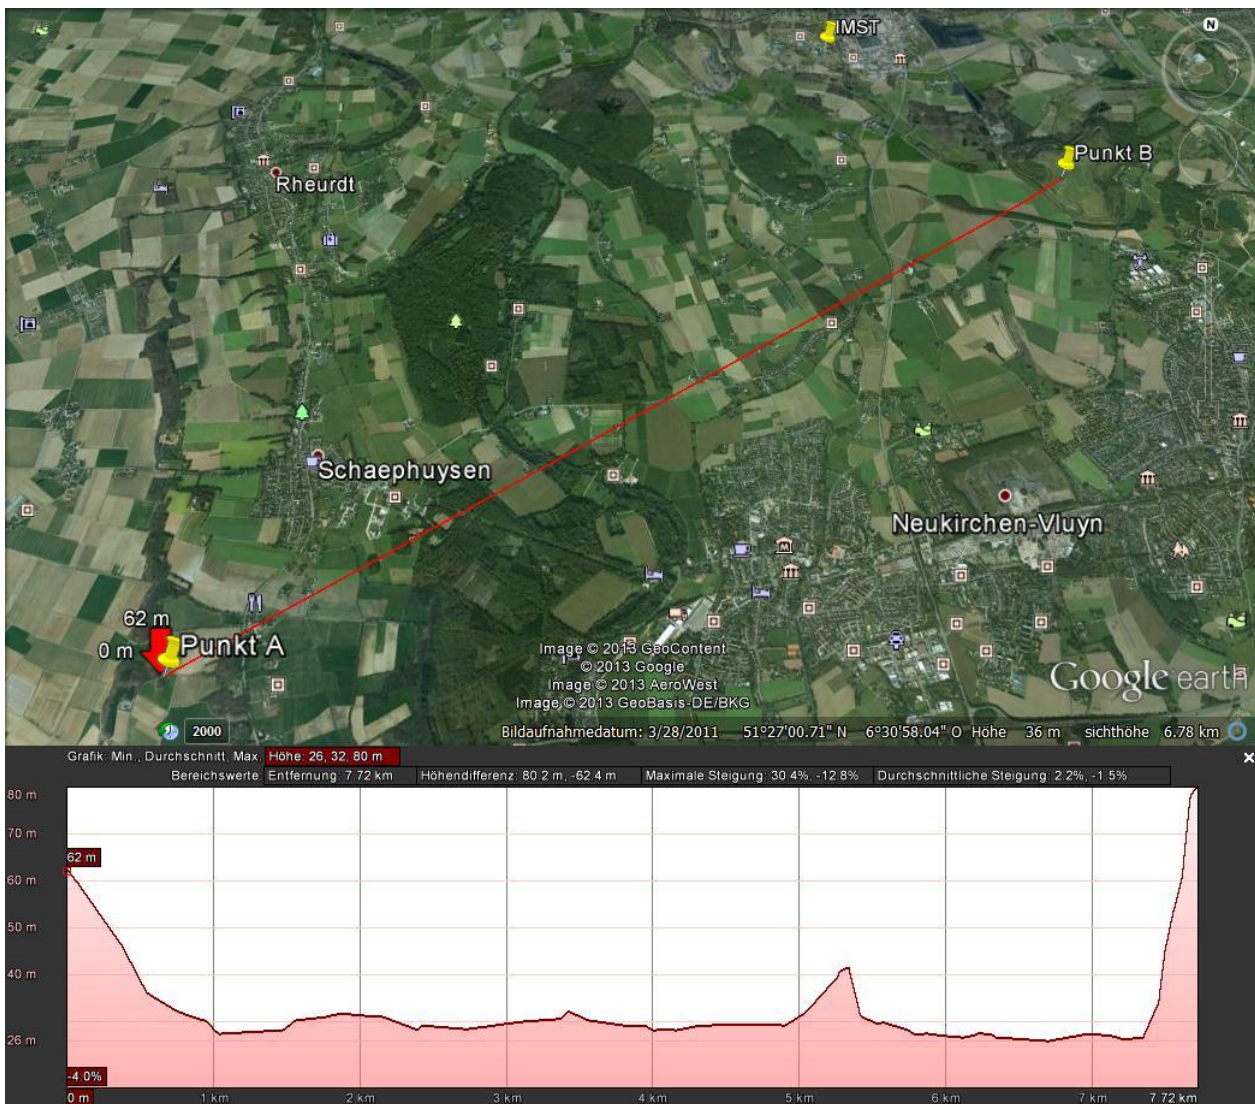


Figure 2-1: Distance and elevation profile between point A and B from Google Earth.

2.1.1 Settings

LoRa Signal Bandwidth: 125 kHz

Devices: iM880A_B101_Nr.1 @Point A; iM880A_B101_Nr.2 @Point B

Distance: 7,720 m

Frequency Band: 869.525 MHz

Payload: 22 Byte

2.1.2 Results

RF Power	Cyclic Coding Rate	Spreading Factor	PER [%]
+20 dBm	4/8	12	0.00
+20 dBm	4/8	7	0.00
+20 dBm	4/6	7	0.00

2-1: Results PER of the Range Test 7720 m with +20 dBm

RF Power	Cyclic Coding Rate	Spreading Factor	PER [%]
+14 dBm	4/8	12	0.00
+14 dBm	4/8	10	0.00
+14 dBm	4/8	7	0.00
+14 dBm	4/6	7	0.31
+14 dBm	4/5	7	0.35

2-2: Results PER of the Range Test 7720 m with +14 dBm

2.2 Test 12000 Meter

This range test was performed on a distance of 12 km near the cities Moers and Kamp-Lintfort.

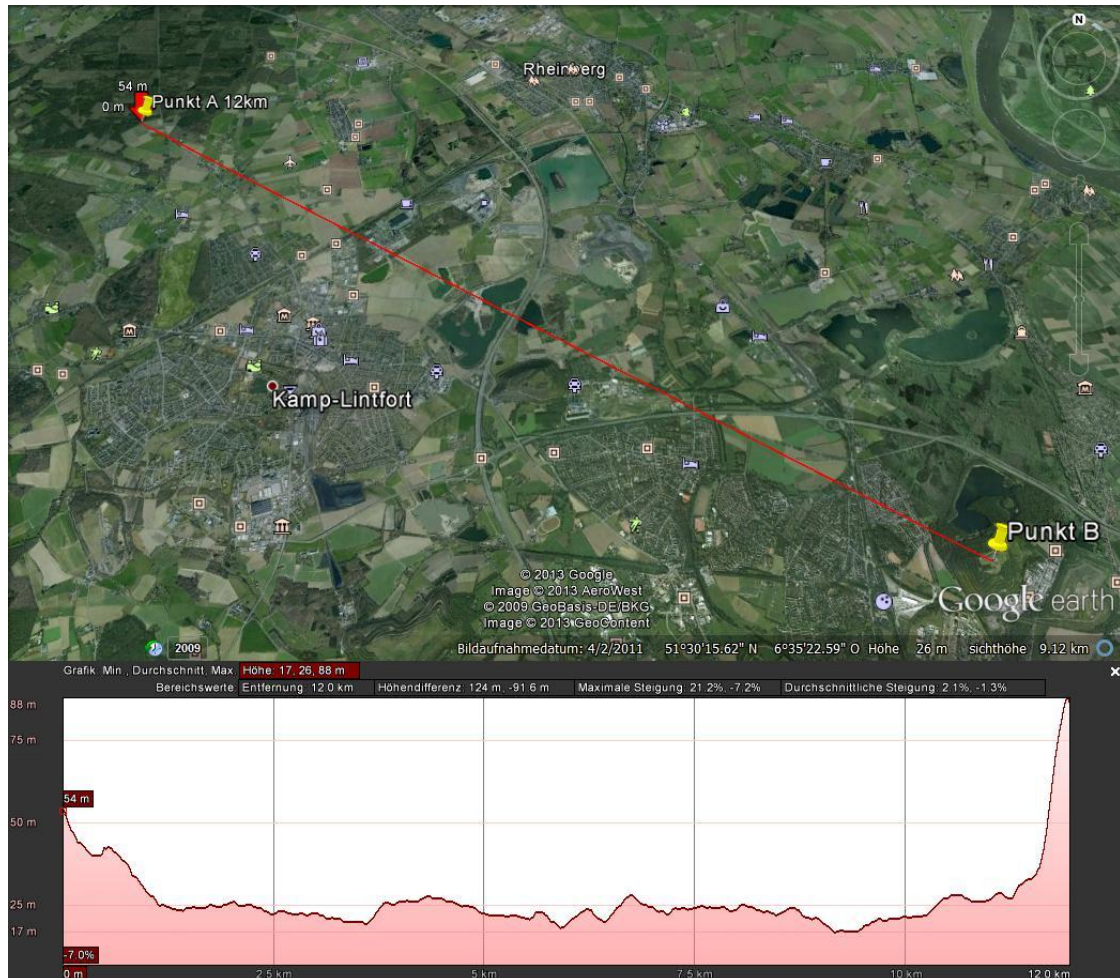


Figure 2-2: Distance and elevation profile between point A and B from Google Earth.

2.2.1 Results

RF Power	Cyclic Coding Rate	Spreading Factor	PER [%]
+20 dBm	4/8	12	0.00
+20 dBm	4/8	11	0.36
+20 dBm	4/8	10	0.65
+20 dBm	4/8	9	1.05
+20 dBm	4/8	8	4.67

2-3: Results PER of the Range Test 12000 m with +20 dBm

RF Power	Cyclic Coding Rate	Spreading Factor	PER [%]
+14 dBm	4/8	12	0.00
+14 dBm	4/8	11	0.00
+14 dBm	4/8	10	0.50
+14 dBm	4/6	9	6.37

2-4: Results PER of the Range Test 12000 m with +14 dBm

3 Appendix

3.1 List of Abbreviations

3.2 List of Figures

Figure 2-1: Distance and elevation profile between point A and B from Google Earth..... 4

Figure 2-2: Distance and elevation profile between point A and B from Google Earth..... 6

3.3 List of Tables

2-1: Results PER of the Range Test 7720 m with +20 dBm..... 5

2-2: Results PER of the Range Test 7720 m with +14 dBm..... 5

2-3: Results PER of the Range Test 12000 m with +20 dBm..... 6

2-4: Results PER of the Range Test 12000 m with +14 dBm..... 7

4 Regulatory Compliance Information

The use of radio frequencies is limited by national regulations. The radio module has been designed to comply with the European Union's R&TTE (Radio & Telecommunications Terminal Equipment) directive 1999/5/EC and can be used free of charge within the European Union. Nevertheless, restrictions in terms of maximum allowed RF power or duty cycle may apply.

The radio module has been designed to be embedded into other products (referred as "final products"). According to the R&TTE directive, the declaration of compliance with essential requirements of the R&TTE directive is within the responsibility of the manufacturer of the final product. A declaration of conformity for the radio module is available from IMST GmbH on request.

The applicable regulation requirements are subject to change. IMST GmbH does not take any responsibility for the correctness and accuracy of the aforementioned information. National laws and regulations, as well as their interpretation can vary with the country. In case of uncertainty, it is recommended to contact either IMST's accredited Test Center or to consult the local authorities of the relevant countries.

5 Important Notice

5.1 Disclaimer

IMST GmbH points out that all information in this document is given on an “as is” basis. No guarantee, neither explicit nor implicit is given for the correctness at the time of publication. IMST GmbH reserves all rights to make corrections, modifications, enhancements, and other changes to its products and services at any time and to discontinue any product or service without prior notice. It is recommended for customers to refer to the latest relevant information before placing orders and to verify that such information is current and complete. All products are sold and delivered subject to “General Terms and Conditions” of IMST GmbH, supplied at the time of order acknowledgment.

IMST GmbH assumes no liability for the use of its products and does not grant any licenses for its patent rights or for any other of its intellectual property rights or third-party rights. It is the customer’s duty to bear responsibility for compliance of systems or units in which products from IMST GmbH are integrated with applicable legal regulations. Customers should provide adequate design and operating safeguards to minimize the risks associated with customer products and applications. The products are not approved for use in life supporting systems or other systems whose malfunction could result in personal injury to the user. Customers using the products within such applications do so at their own risk.

Any reproduction of information in datasheets of IMST GmbH is permissible only if reproduction is without alteration and is accompanied by all given associated warranties, conditions, limitations, and notices. Any resale of IMST GmbH products or services with statements different from or beyond the parameters stated by IMST GmbH for that product/solution or service is not allowed and voids all express and any implied warranties. The limitations on liability in favor of IMST GmbH shall also affect its employees, executive personnel and bodies in the same way. IMST GmbH is not responsible or liable for any such wrong statements.

Copyright © 2013, IMST GmbH

5.2 Contact Information

IMST GmbH

Carl-Friedrich-Gauss-Str. 2-4
47475 Kamp-Lintfort
Germany

T +49 2842 981 0

F +49 2842 981 299

E wimod@imst.de

I www.wireless-solutions.de